




WEAR GLOVES WHEN HANDLING


EVEREDGE GARDEN RING INSTALLATION GUIDELINES



1

Firstly, prepare your turf area in accordance with the diameter of your Garden Ring.

- 1-piece approximately 300 mm diameter.
- 2-piece approximately 600 mm diameter.
- 3-piece approximately 900 mm diameter.
- 4-piece approximately 1200 mm diameter.
- 5-piece approximately 1500 mm diameter.



2

Using the coachbolts and nuts provided, assemble the Garden Ring around the tree.

The head of the coachbolts should face the side of the ring which will be visible after installation.

At this stage, the Garden Ring probably will not be the exact shape you require.

Because EverEdge is flexible, you will now be able to flex the ring gently to match your cut earth circle.


Using a wooden or rubber mallet and a timber block (see below left) knock the Garden Ring firmly into place.

NOTE: The top of the Garden Ring should be level with the point where the soil and grass meet


IMPORTANT

As with any sharp, pointed object, the spikes on the Garden Ring could cause injury if the product is handled carelessly


CorTen steel is a raw and untreated metal. Corrosive substances such as salt and patio cleaners will eventually rot the steel. The longevity of CorTen in coastal loations can be greatly reduced

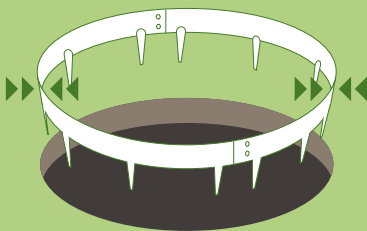

3

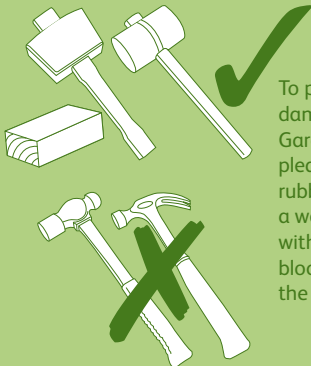

To prevent damage to the Garden Ring please use only a rubber mallet or a wooden mallet with a timber block to knock in the ring



CorTen